

_Lightning Protection Unit AUX-ODU-LPU-G (new)

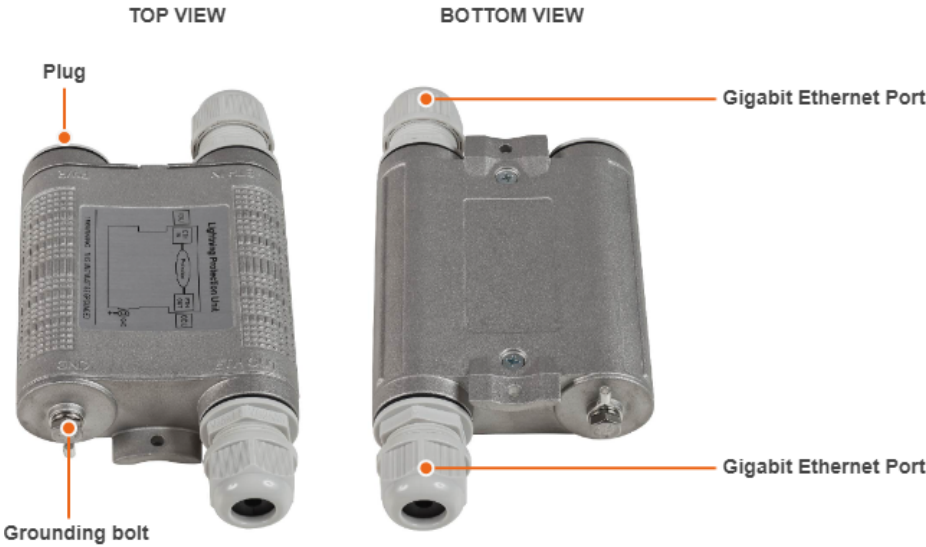


Figure - AUX-ODU-LPU-G

Optional indoor/outdoor Lightning Protection Unit for Infinet Wireless systems designed to withstand the toughest conditions and protect the outdoor or the indoor unit from sudden power surges induced by lightning strikes. It provides the same level of protection as AUX-ODU-INJ-G. AUX-ODU-LPU-G is compatible with all Infinet Wireless devices.

Despite the fact every Infinet Wireless unit has a built-in lightning protection, AUX-ODU-LPU-G, thanks to its superior GR-1089-grade protection, greatly reduces the risk of replacing damaged devices operating in harsh environments or difficult-to-reach locations.



NOTE

The device is not supplied by default and must be ordered separately.

Parameter	Description																		
Size and Weight	<ul style="list-style-type: none">34x94x121 mm, 0.28 kg																		
Connectors and Interfaces	<ul style="list-style-type: none">ETH IN - Ethernet inputETH OUT - Ethernet output (protected leg)GND - Ground clamp																		
Supported Ethernet Modes	<ul style="list-style-type: none">10/100/1000 Mbps (Gigabit Ethernet pass-through)																		
Water and Dust Protection	<ul style="list-style-type: none">IP66 and IP67																		
Operating temperature range	<ul style="list-style-type: none">-55 °C ... +60 °C																		
ETH IN and ETH OUT pin-out	<table><tr><th>Pin</th><th>1</th><th>2</th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th><th>8</th></tr><tr><th>Data pair</th><td>A+</td><td>A-</td><td>B+</td><td>C-</td><td>C+</td><td>B-</td><td>D+</td><td>D-</td></tr></table>	Pin	1	2	3	4	5	6	7	8	Data pair	A+	A-	B+	C-	C+	B-	D+	D-
	Pin	1	2	3	4	5	6	7	8										
Data pair	A+	A-	B+	C-	C+	B-	D+	D-											
Lightning Protection	<p>In compliance with:</p> <ul style="list-style-type: none">GR-1089IEC 61000-4-2 (ESD) 15kV (air), 8kV (contact)IEC 61000-4-4 (EFT) 40A (tp = 5/50ns)IEC 61000-4-5 (Lightning) L5, 95A (tp = 8/20us)ETSI ETS 300 386																		

Table - AUX-ODU-LPU-G Specification

Packing list



Figure - Packing list AUX-ODU-LPU-G

AUX-ODU-LPU-G is supplied with a worm clamp TORRO 40-60/9 C7 W4 DIN 3017 - 2 pcs. The clamp is made of stainless steel A4, width 9 mm, allows the installation on a mast with a diameter of 35 to 60 mm. In case of mast diameter more than 60 mm, a similar clamps (up to a 230 mm diameter) with a width of up to 12-13 mm can be used.